


# LCX21 - LYRA RGBW

1 X 2 SOFT PANEL DIGITAL COLOR LIGHT

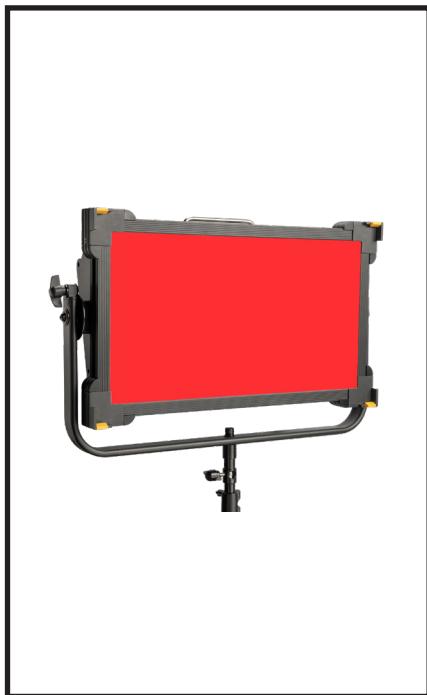

The Lyra RGBW Digital Color lights have high CRI chip LEDs paired with a soft panel, giving you a very soft wrapping light. Its variable color adjust ability from 2700K-10000K is great for any light setup. The RGBW also give the professional a variety of colors to play and create with. The beam angle of the light is a wide 110 degrees, making it possible to light a large area with a single fixture. The best thing about a Lyra soft light is the nice clean shadow you get from the light itself. The HSI color mode allows you to adjust the hue, saturation, and intensity.

- 97 CRI Chip LEDs paired with 1/2 stop soft diffusion panel
- Full RGB color, Saturation, and HSI control
- **Variable CCT:** 2800K-10000K
- Beam Angle of Soft panel 110° degrees
- A Clean single shadow without the artifacts
- 8-bit & 16-bit DMX
- **Hue Shift:** +green/-magenta 0-100%
- Baby 5/8 inch/Junior 1-1/8 Combo Pin adapter with right angle receiver hole
- Quick set disk locking system for positioning the light
- Color correction filter gels
- Special lighting effects
- Heavy Duty Aluminum Construction
- 300 Watt Power Consumption

## FEATURES

- **Studio and Field** - The LCX21 can be controlled via the onboard controller or remotely via DMX. The light can also be powered by an optional V-Mount battery when a main power is unavailable.
- **Color Matching** - In the CCT mode you have the option to adjust not only the color temperature and brightness, but you can also adjust the plus minus green/magenta. This allows the LCX21 to easily color match your current or future lights.
- **Special Effects** - The LCX21 has 8 special effects including cop car, lightning, candle and fireworks. Some special effects like lightning and fireworks has an additional manual trigger feature to allow you to trigger then effect when you need it to be triggered in your scene.
- **Sturdy Lock System** - The heavy duty yoke and baby 5/8 or 1 1/8 Junior combo pin allow you to attach to any stand or use in any studio configurations. The quick set disk locking system allows professionals to lock the light in place when aiming the fixture.

## Fixture Specifications

- Beam Angle: 110° Degree
- Build Material: Metal & Plastic Shell
- Cooling System: Active Cooling
- Dimming: DMX & Local Knob Control
- Fixture Power Consumption: 300 Watts
- Lens: 1/2 Stop Diffusion
- Power Supply: Input 100-220VAC; Output 27.2VDC

# LCX21 - LYRA RGBW

1 X 2 SOFT PANEL DIGITAL COLOR LIGHT



## PHOTOMETRICS

3200K	FC	LUX	BEAM SPREAD
5 ft. / 1.5m	400	4300	14 ft. / 4.2m
10 ft. / 3m	89	955.2	TL
15 ft. / 4.5m	45	484.6	TL

4400K	FC	LUX	BEAM SPREAD
5 ft. / 1.5m	428	4609	14 ft. / 4.2m
10 ft. / 3m	95	1022	TL
15 ft. / 4.5m	48	521	TL

5600K	FC	LUX	BEAM SPREAD
5 ft. / 1.5m	470	5062	14 ft. / 4.2m
10 ft. / 3m	104	1116	TL
15 ft. / 4.5m	53	575	TL

## ACCESSORIES

LEC20	Honeycomb 60° for Lyra Studio Soft Light
LEC20-30	Honeycomb 30° for Lyra 1 x 2 Studio Soft Light
LBD20	Barn Doors for Lyra 1 x 2 Studio Soft Light
PC9M	Heavy duty pipe clamp for large, heavy fixtures. For pipes up to 2" O.D.
SC	Safety Cable

## ORDERING INFORMATION

PROJECT:	
LOCATION:	
QUANTITY:	
CONTACT:	
PHONE:	
EMAIL:	